

## Fixed Broadband Access

# Fixed Broadband Access

## Fritz!Box: Manual firmware update

Version 0.2

Windhoek, 11<sup>th</sup> of November 2014

- **FRITZ!Box firmware updates.**

Fritz!Box CPE's available at Telecom Namibia and their corresponding firmware IDs:

<u>Model</u>	<u>Firmware Version Numbering</u>	
Fritz!Box 5113	83.XX.XX	<i>i.e. 83.04.84</i>
Fritz!Box 7113	90.XX.XX	
Fritz!Box 7170	58.XX.XX	
Fritz!Box 7270 v2	54.XX.XX	
Fritz!Box 7270 v3	74.XX.XX	
Fritz!Box 7272	120.XX.XX	
Fritz!Box 7330	107.XX.XX	
Fritz!Box 7360 v1	111.XX.XX	
Fritz!Box 7360 v2	124.XX.XX	
Fritz!Box 7390	84.XX.XX	

**The correct firmware file for your specific Fritz!Box model will always start with the highlighted numerals as shown above.**


### 1. Manual firmware update (file):

Step 1. The Fritz!Box firmware image file should be saved on your PC or USB flash drive.  
*If you are not sure about the version of your Fritz!Box just continue with the steps 1 to 5. Step 5 shows how to verify the version for your device.*

Step 2. Open the FRITZ!Box user interface. By entering <http://fritz.box> in a web browser.



Step 3. Enter your Fritz!Box interface password: Default password: **admin**

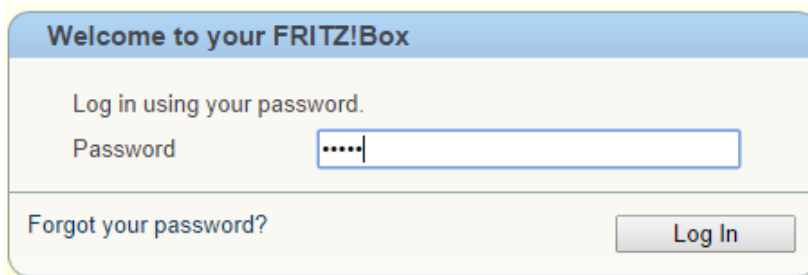


Welcome to your FRITZ!Box

Log in using your password.


Password

[Forgot your password?](#)


Step 4. Make sure that 'Advanced View' or 'Expert Mode' is enabled by going to: Settings > View > Advanced View >> Apply

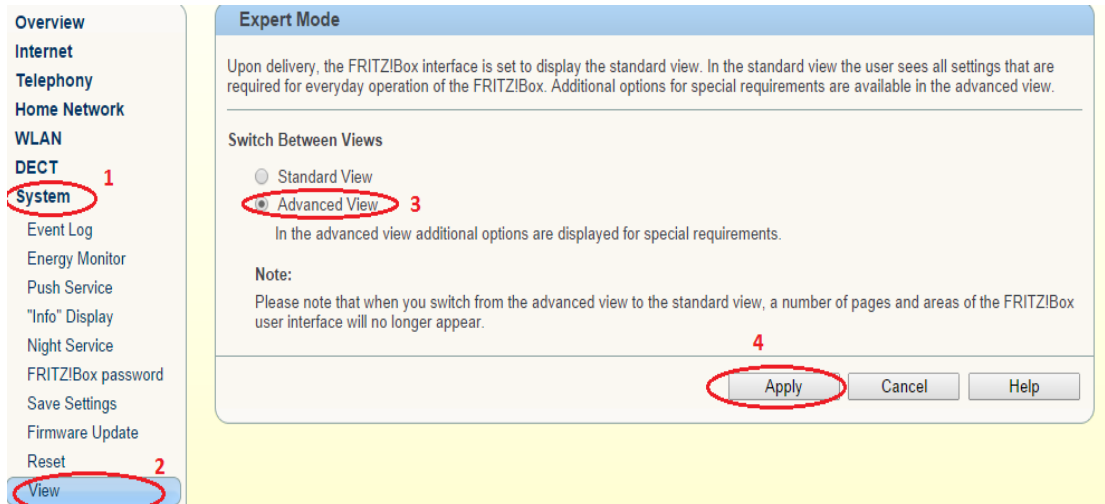


Step 5. Go to "Settings" > "System" > "Update Firmware" then select the "Firmware File" tab. ('Advanced View' must be enabled to have this option appear for some versions)

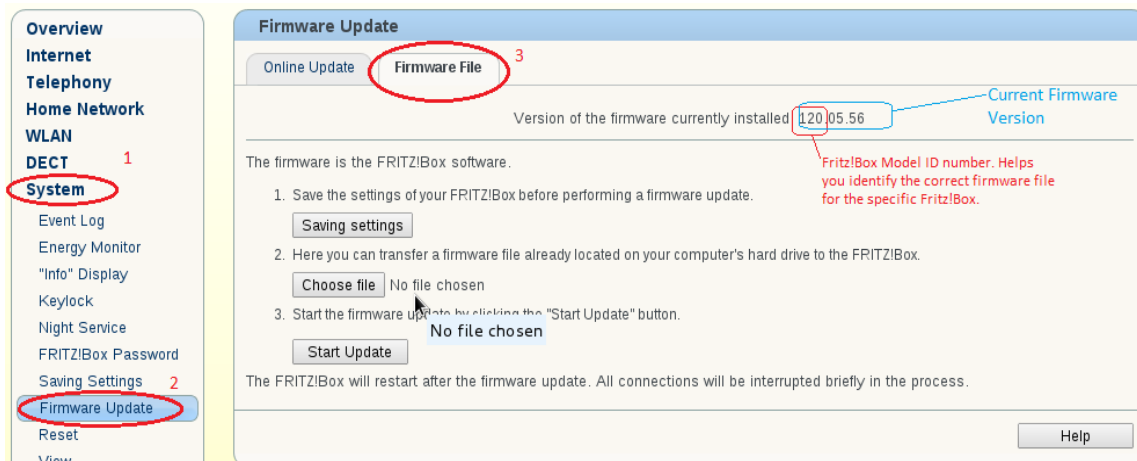

Step 6. Click "Save settings", (saves and backs up Fritz!Box settings).

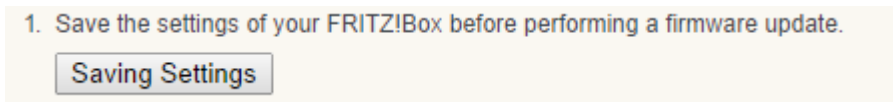


Step 7. Click 'Browse...' or 'Choose File' to browse to where you had saved the firmware image file on your hard disk or USB flash drive.



Step 8. Click the "Update" button.

3. Start the firmware update by clicking the "Start Update" button.

A rectangular button with a light gray border and a light beige background, containing the text "Start Update" in a dark gray font.

Step 9. The update procedure will now begin. During this time the INFO-LED (light) will start flashing. Do not interrupt the power supply to the FRITZ!Box while the INFO LED is blinking!

Step 10. Once the INFO LED stops blinking then it will restart.